
3"
2
1½"
83°
1
1½"

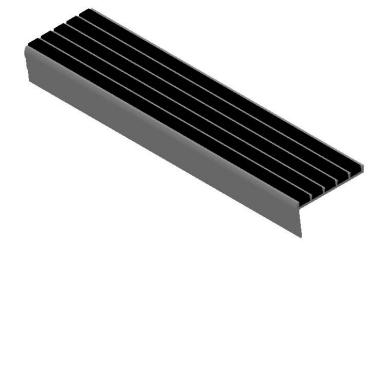

## **MODEL A3D**

(SINGLE STAGE RIBBED ABRASIVE BARS)

## SPECIFICATIONS:

- 1 BASE: EXTRUDED ALUMINUM ALLOY 6063 T-5
- (2) ABRASIVE: ALUMINUM OXIDE SILICON CARBIDE GRANULES IN A UV PROTECTED, 2 PART EPOXY, LOCKED INTO EXTRUDED CHANNELS
- 3. BASE FINISH: MILL
- 4. POURED CONCRETE STAIRS: NOSING SHALL TERMINATE NO MORE THEN 3" FROM END OF STEDS
- 5. CONCRETE FILLED STEEL PAN STAIRS: NOSING SHALL BE FULL LENGTH OF STEPS, LESS 1/8" CLEARANCE
- 6. COLOR: BLACK (STANDARD), SAFETY YELLOW, GRAY, RED, BROWN, GREEN, BURGUNDY, BLUE, BUFF, LUMINESCENT

- 7. **LENGTH:** 12'0" MAXIMUM
- 8. COUNTER SUNK HOLES PRE-DRILLED FOR A #10 FASTENER SPACED 3" FROM ENDS AND APPROXIMATELY 12" TO 15" O.C.
- 9. UL 1994 LISTED: COMBINED WIDTH OF PHOTO-LUMINESCENT MATERIAL SHALL NOT BE LESS THAN 1"

LENGTH	QTY	COLOR

Distributed by:

## **Canadian Master Distributor**

🖂 sales@cityscapesupply.com

cityscapesupply.com

	I	PROJEC	CT:					
ARCHITECT:								
CONTRACTOR:								
	QTY:							
	PART#:  Name of the part of th			STSB-A3D				
					V850, Stair Tread, ar Ribbed Abrasive	,		
	9300 73rd Avenue North Minneapolis, MN 55428				Long Nose Angled, Drilled For Bolt In,			
		NAME	DATE	SIZE	DWG. NO.			REV
	DRAWN	ВМН	3/11/11	Α	Nystrom S	TN STSB-A3D S	ShpDr	Α
	RELEASED	PF	3/11/11	WE	FIGHT: 1 33 LB SHEET 1 /			

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

1