
-

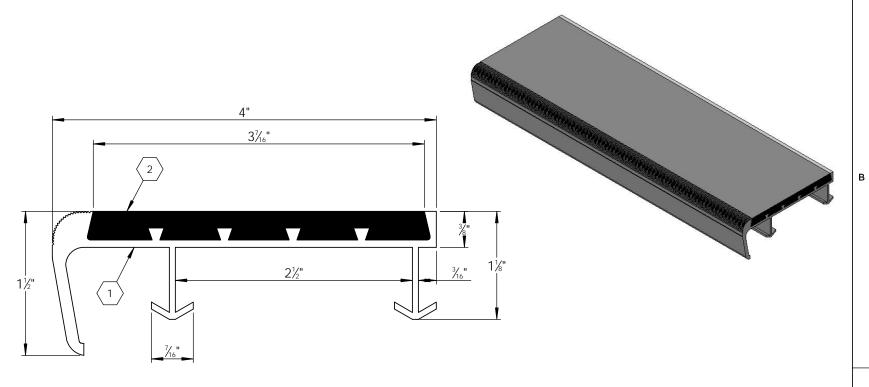

MODEL STSF-L4E

(SINGLE STAGE FULL ABRASIVE)

SPECIFICATIONS:

- 1 BASE: EXTRUDED ALUMINUM ALLOY 6063 T-5
- (2) ABRASIVE: ALUMINUM OXIDE SILICON CARBIDE GRANULES IN A UV PROTECTED, 2 PART EPOXY, LOCKED INTO EXTRUDED CHANNELS
- 3. BASE FINISH: MILL
- 4. POURED CONCRETE STAIRS: NOSING SHALL TERMINATE NO MORE THEN 3" FROM END OF STEPS
- 5. CONCRETE FILLED STEEL PAN STAIRS: NOSING SHALL BE FULL LENGTH OF STEPS, LESS 1/8" CLEARANCE
- 6. COLOR: BLACK (STANDARD), SAFETY YELLOW, GRAY, RED, BROWN, GREEN, BURGUNDY, BLUE, BUFF, LUMINESCENT

- 7. **LENGTH**: 12'0" MAXIMUM
- 8. **UL 1994 LISTED:** COMBINED WIDTH OF PHOTO-LUMINESCENT MATERIAL SHALL NOT BE LESS THAN 1"

QTY	COLOR
	QTY

Distributed by:

CITYSCAPESUPPLY

Canadian Master Distributor

cityscapesupply.com

647 498 3417

		PROJEC	CT:					
	Α	RCHITE	CT:					
CONTRACTOR:								
	QTY:							
	PART#:			STSF-L4E				
9300 73rd Avenue North Minneapolis, MN 55428				n	TITLE: Stair Tread, Full Abrasive, Long Nose, Alum Extruded Anchor, Single Stage			
		NAME	DATE	SIZE	DWG. N			REV
	DRAWN	DKL	4/17/17	Α		STSF-L4E		Α
	RELEASED	DT	1/17/17	WE	ICHT: 1.5	OLB	SHEET 1 (7F 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

1

A