


MODEL P3.375E-ECO

(TWO STAGE RIBBED ECO-TREAD BARS)

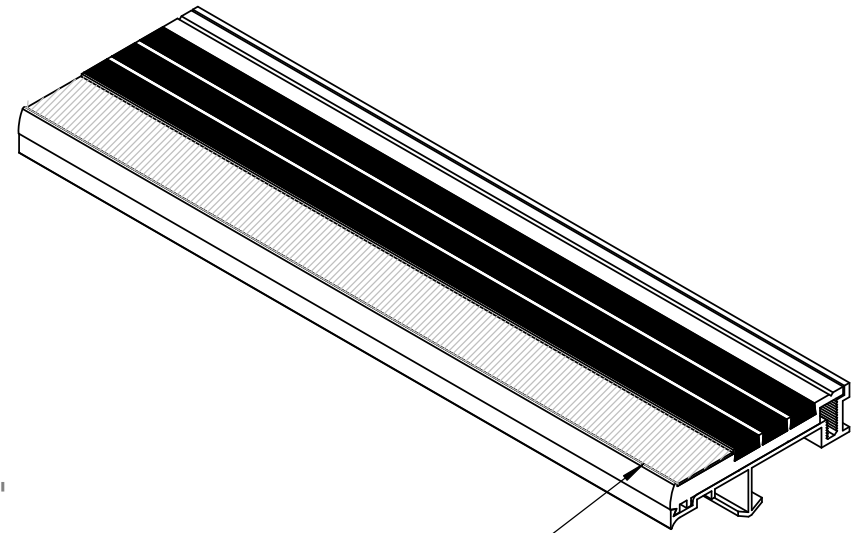

PHOTOLUMINESCENT TAPE

SPECIFICATIONS:

- ① **BASE:** EXTRUDED ALUMINUM ALLOY 6063 T-5
- ② **ECOTREAD:** RECYCLED RUBBER SHEET
8MM RECYCLED RUBBER GRANULES
ENCAPSULATED IN A WEAR AND WATER
RESISTANT ELASTOMERIC NETWORK. 2 PARTS
3. **BASE FINISH:** MILL
4. **POURED CONCRETE STAIRS:** NOSING SHALL
TERMINATE NO MORE THEN 3" FROM END OF
STEPS
5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING
SHALL BE FULL LENGTH OF STEPS, LESS 1/8"
CLEARANCE
6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW

7. **LENGTH:** 12'0" MAXIMUM
8. **UL 1994 LISTED:** COMBINED WIDTH OF PHOTO-
LUMINESCENT MATERIAL SHALL NOT BE LESS
THAN 1"

LENGTH	QTY	COLOR

Distributed by:




Canadian Master Distributor

✉ sales@cityscapesupply.com

🌐 cityscapesupply.com

☎ 647 498 3417

PROJECT:			
ARCHITECT:			
CONTRACTOR:			
QTY:			
PART#:		STTM-P3.375E-ECO	
 9300 73rd Avenue North Minneapolis, MN 55428		TITLE:	
		Two Stage Rib, Stair Tread, Bar Ribbed Ecotread, Short Nose, Alum Extruded Anchor, Black, Photoluminescent Tape	
NAME	DATE	SIZE	DWG. NO.
DRAWN	DKL	6/4/21	A
RELEASED	GLN	6/4/21	WEIGHT:
Nystrom STN STTM-P3.375E-ECO ShpDr			REV A
SHEET 1 OF 1			