

FIRE RESISTANT DETECTABLE WARNINGS

DESIGNED FOR INTERIOR APPLICATIONS

FIRE-RESISTANT DETECTABLE WARNINGS:

Detectable Warning Systems introduces fire-resistant detectable warnings to our line of AODA compliant products. Designed and engineered for exist stair wells, vestibules to exit stairs, lobbies, and corridors.

alerttile®



RIGID SURFACE APPLIED
DETECTABLE WARNING

FEATURES:

- Meets ULC-S102.2 fire standard at less than 25 flame and less than 50 smoke.
- In full compliance with Canadian Accessibility Codes.
- Meets the requirements of the Ontario Building Code (OBC) 2012 Table 3.1.13.7.
- Meets or exceeds AODA, CSA, ISO, NFPA 130, as well as provincial and national building codes.
- Beveled edges make for easy pedestrian access that meets Canadian Accessibility Codes.

alertcast®

INDUSTRY'S BEST REPLACEABLE
CAST-IN-PLACE DETECTABLE WARNING

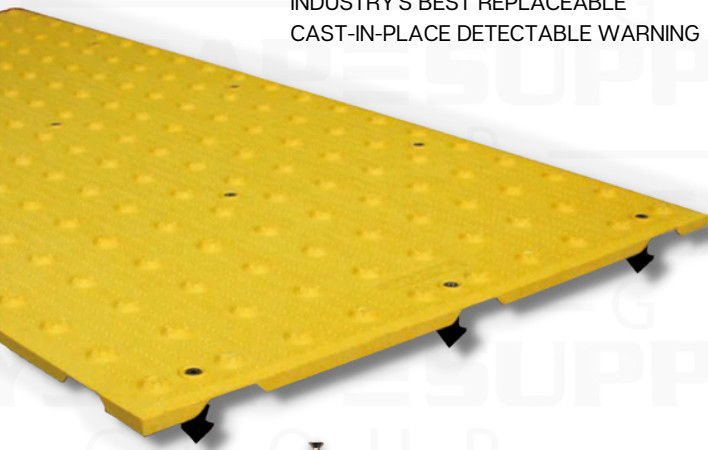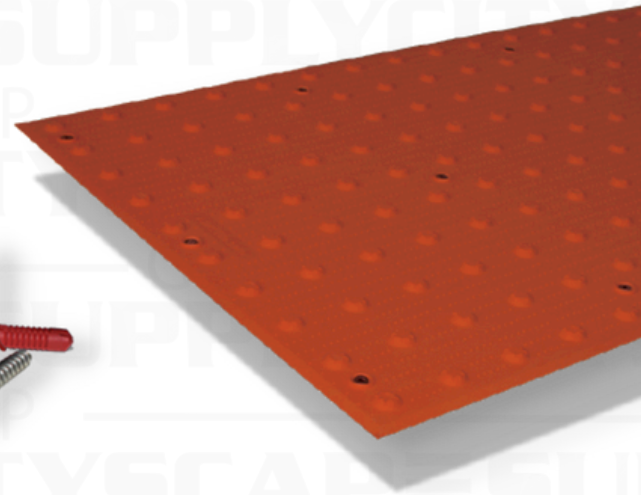

PHYSICAL CHARACTERISTICS:

- ASTM D 790 - Flexural Strength ≥ 156 MPa.
- ASTM D 638 - Tensile Strength ≥ 66 MPa.
- ASTM C 1028 - Static Coefficient of Friction ≥ 0.8 wet/dry.
- ULC S102.2 - Flame Spread ≤ 10 .
- ULC S102.2 - Smoke Development ≤ 50 .
- ASTM E648 - Critical Radiant Flux ≥ 1.1 W/cm².
- ASTM D 570 - Water Absorption $\leq 0.05\%$.
- ASTM C 1026 - Freeze/thaw No effect.
- ASTM B 117 - Salt Spray (300 hrs) No effect.
- ASTM D 1037 - Accelerated Aging Cycle Testing No effect.
- ASTM D 543 - Chemical Resistance No effect.

COLOURS:



Yellow



Colonial Red



Brick Red



Safety Red



Black



Grey



FIRE RESISTANT DETECTABLE WARNINGS

DESIGNED FOR INTERIOR APPLICATIONS

FIRE-RESISTANT DETECTABLE WARNINGS:

Detectable Warning Systems introduces fire-resistant detectable warnings to our line of AODA compliant products. Designed and engineered for exist stair wells, vestibules to exit stairs, lobbies, and corridors.

FEATURES:


- Meets ULC-S102.2 fire standard at less than 25 flame and less than 50 smoke.
- In full compliance with Canadian Accessibility Codes.
- Meets the requirements of the Ontario Building Code (OBC) 2012 Table 3.1.13.7.
- Meets or exceeds AODA, CSA, ISO, NFPA 130, as well as provincial and national building codes.
- Beveled edges make for easy pedestrian access that meets Canadian Accessibility Codes.

alertcast®

INDUSTRY'S BEST REPLACEABLE
CAST-IN-PLACE DETECTABLE WARNING

alerttile®

RIGID SURFACE APPLIED
DETECTABLE WARNING

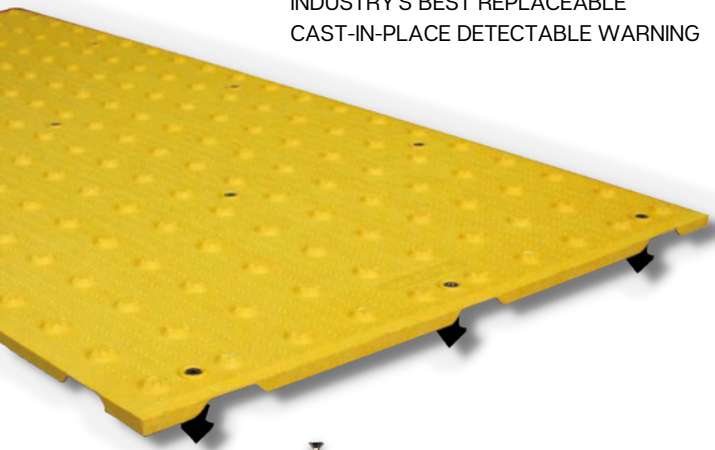

COLOURS:



Yellow




Colonial Red



Brick Red



Safety Red



Black



Grey

PHYSICAL CHARACTERISTICS:

- ASTM D 790 - Flexural Strength ≥ 156 MPa.
- ASTM D 638 - Tensile Strength ≥ 66 MPa.
- ASTM C 1028 - Static Coefficient of Friction ≥ 0.8 wet/dry.
- ULC S102.2 - Flame Spread ≤ 10 .
- ULC S102.2 - Smoke Development ≤ 50 .
- ASTM E648 - Critical Radiant Flux ≥ 1.1 W/cm².
- ASTM D 570 - Water Absorption $\leq 0.05\%$.
- ASTM C 1026 - Freeze/thaw No effect.
- ASTM B 117 - Salt Spray (300 hrs) No effect.
- ASTM D 1037 - Accelerated Aging Cycle Testing No effect.
- ASTM D 543 - Chemical Resistance No effect.